

Marinflex

Type MPM & MPBM



For many years these isolators have provided highly effective control of vibration, structure-borne noise and shock under most stringent and rigorous conditions experienced on marine and other mobile installations.

They have also been applied very successfully to a wide range of machinery employed in industrial and office buildings. Both of the two MPM sizes of isolator designed and manufactured by us are available in pedestal or bracket form for conventional or side mounting.

Different rubber stiffnesses are available for each isolator type and size and this facilitates selection of the isolators with the best characteristics for a particular application.

General type approval has been given by Lloyd's Register of Shipping.



DESIGN FEATURES

- SG iron castings to BS EN 1563 EN-GJS-400/15.
- Resilient elements are first grade natural rubber to metal bonded units.
- By loading the rubber elements in combined shear and compression a good balance between high load capacity and static deflection has been achieved.
- Rubber elements are contained and protected within top and base metals. The shape of the top and the rubber elements are designed to increase stiffness and control movement under overload conditions.
- Rebound washers are incorporated to control movement due to ship or vehicle motion.
- High lateral to vertical stiffness ratio of rubber element assists in the control of motion and in many instances obviates the need for additional external side and end restraints.


TYPICAL APPLICATIONS

- Marine Propulsion Engines.
- Diesel Generating Sets.
- Pumps and Compressors.
- Control Cabinets.


MPM Size 1

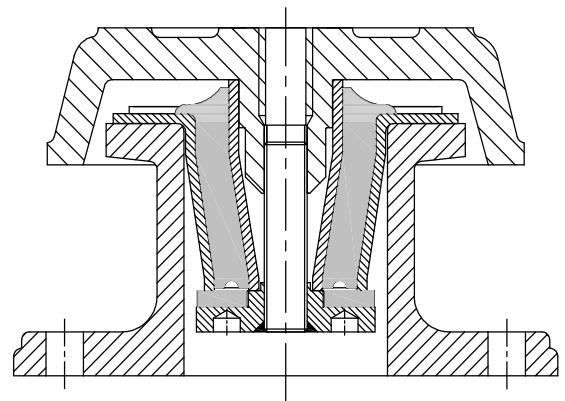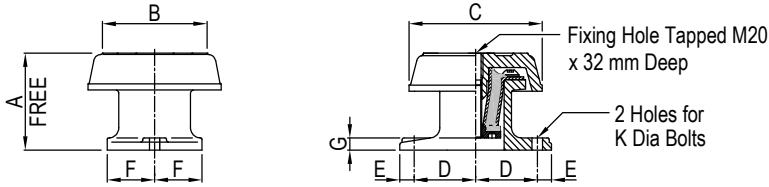


MPBM Size 1

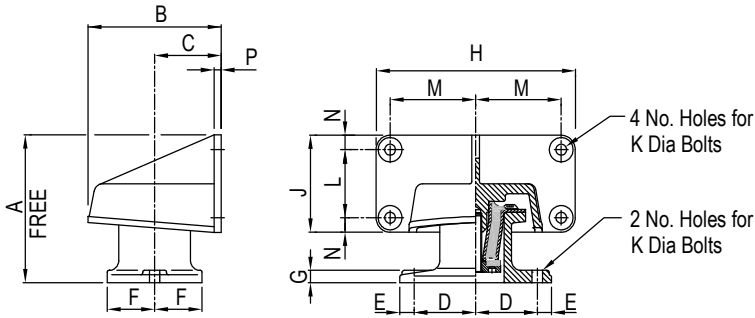

MPM Size 2

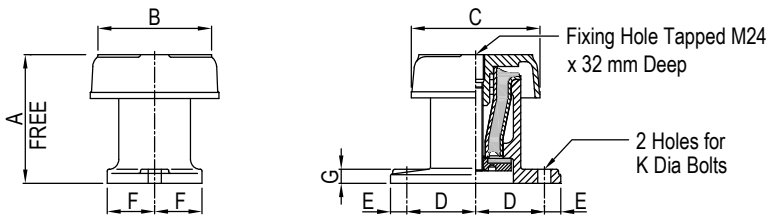

MPBM Size 2

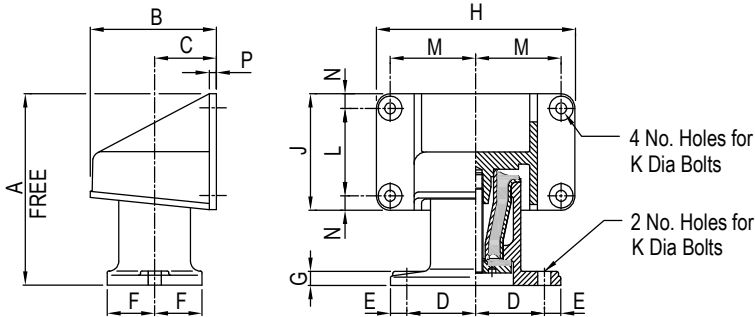

TYPE MPM & MPBM ISOLATORS

| REFERENCE | LABEL COLOUR | MAXIMUM LOAD (kg) | VERTICAL DYNAMIC STIFFNESS (kN/m) | HORIZONTAL DYNAMIC STIFFNESS (kN/m) |
|---------------|--------------|-------------------|-----------------------------------|-------------------------------------|
| MP(B)M SIZE 1 | YELLOW | 350 | 594 | 2376 |
| | BLUE | 520 | 920 | 3680 |
| | GREEN | 660 | 1212 | 4848 |
| | RED | 725 | 1562 | 6250 |
| | BLACK | 950 | 2187 | 8748 |
| MP(B)M SIZE 2 | YELLOW | 635 | 1067 | 4477 |
| | BLUE | 900 | 1587 | 6670 |
| | GREEN | 1060 | 2160 | 9072 |
| | RED | 1440 | 2750 | 11562 |
| | BLACK | 1590 | 3820 | 16065 |

Black and Blue Variants readily available.
All other variants available to special order on extended delivery.

Stiffness

- Stiffness is linear over the working load range.
- Dynamic stiffness may vary with frequency. Values stated are reliable for calculation of low frequency characteristics below 100 Hz.

| REFERENCE | DIMENSIONS (mm) | | | | | | | | | | | | | | WT (kg) MAX |
|---------------|-----------------|-----|------|------|----|------|----|-----|-------|----|-------|-------|------|----|-------------|
| | A | B | C | D | E | F | G | H | J | K | L | M | N | P | |
| MPM SIZE 1 | 127 | 140 | 178 | 82.5 | 19 | 63.5 | 16 | - | - | 12 | - | - | - | - | 9.0 |
| MPBM | 193.5 | 178 | 89 | 82.5 | 19 | 63.5 | 16 | 268 | 128 | 12 | 89 | 114.5 | 19.5 | 12 | 12.5 |
| MPM SIZE 2 | 168.5 | 152 | 172 | 92 | 22 | 63.5 | 20 | - | - | 16 | - | - | - | - | 14.5 |
| MPBM | 251 | 168 | 82.5 | 92 | 22 | 63.5 | 20 | 266 | 152.5 | 16 | 114.5 | 114.5 | 19 | 10 | 20.5 |

For full installation instructions please refer to our data sheet DS010.

For more detailed information and technical assistance please contact our Technical Department.

In the interests of continual development, the Company reserves the right to make modifications to these details without notice.



Christie & Grey Limited

Morley Road, Tonbridge, Kent TN9 1RA, England

Telephone : +44 (0) 1732 371100 • Fax: +44 (0) 1732 359666

E-mail : sales@christiegrey.com • web site: www.christiegrey.com

