



DIMENSIONS IN MILLIMETRES (mm) UNLESS OTHERWISE STATED  
 TOLERANCES EXCEPT WHERE OTHERWISE STATED  $\pm 0.25\text{mm}$   
 NON-CONTROLLED UNLESS STAMPED OTHERWISE.

First angle  
 projection



Q  
C  
F  
6  
0  
  
I  
S  
S  
U  
E  
  
3

GENERAL ARRANGEMENT OF ES25/30/ZSB – ES25/250/ZSB  
ENCLOSED SPRING MOUNTINGS – ZINC SPRAYED

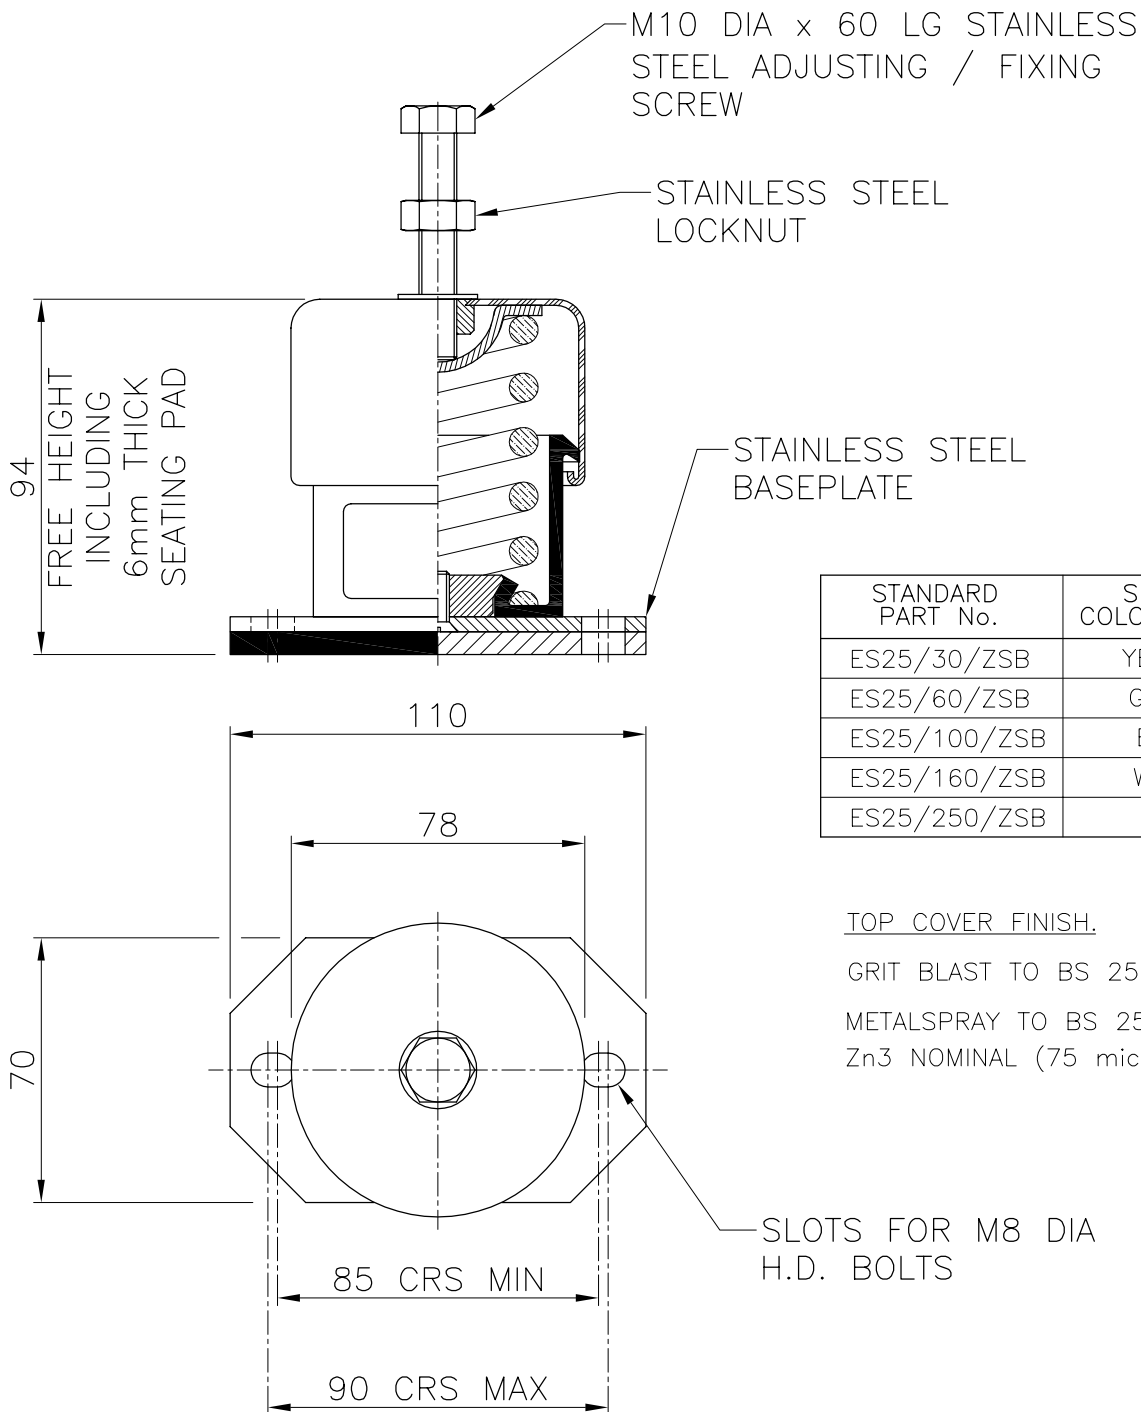

STANDARD PART No.	SPRING COLOUR CODE
ES25/30/ZSB	YELLOW
ES25/60/ZSB	GREEN
ES25/100/ZSB	BLUE
ES25/160/ZSB	WHITE
ES25/250/ZSB	RED

TOP COVER FINISH.

GRIT BLAST TO BS 2569 Part 1


METALSPRAY TO BS 2569 Part 1

Zn3 NOMINAL (75 microns).

CLIENT : WOODS AIR MOVEMENT LIMITED.

FOR GENERAL DETAILS SEE CHRISTIE & GREY LEAFLET PLO04.

FOR INSTALLATION INSTRUCTIONS SEE CHRISTIE & GREY  
 DATA SHEET DS 026 & DS COSHH 0001 RESPECTIVELY.

Drawing No. S 162	A	B	C	D	E	Job No. –	 Engineers in vibration, noise and shock control. Christie & Grey Morley Road, Tonbridge, Kent, TN9 1RA England
	02/02/00	09/02/00	02/08/04	19/04/05	02/11/05	Scale 1 : 2	
Change note No.		045	172	047	138	Drawn A.R.B	
						Checked G.E.K	