DIMENSIONS IN MILLIMETRES (mm) UNLESS OTHERWISE STATED
TOLERANCES EXCEPT WHERE OTHERWISE STATED ± 0.25mm
NON–CONTROLLED UNLESS STAMPED OTHERWISE.

First angle projection



QCF60 ISSUE 3

GENERAL ARRANGEMENT OF ORS25/200 – ORS25/1000
OPEN RESTRAINED SPRING MOUNTINGS

PART No.	COLOUR CODE
ORS25/200	RED
ORS25/300	PURPLE
ORS25/400	GREY
ORS25/500	ORANGE
ORS25/600	BROWN
ORS25/700	ORANGE/BLACK*
ORS25/800	BLACK
ORS25/1000	BLUE
ORS25/1200	BLUE/BLACK*

* INTERNAL NESTED SPRING

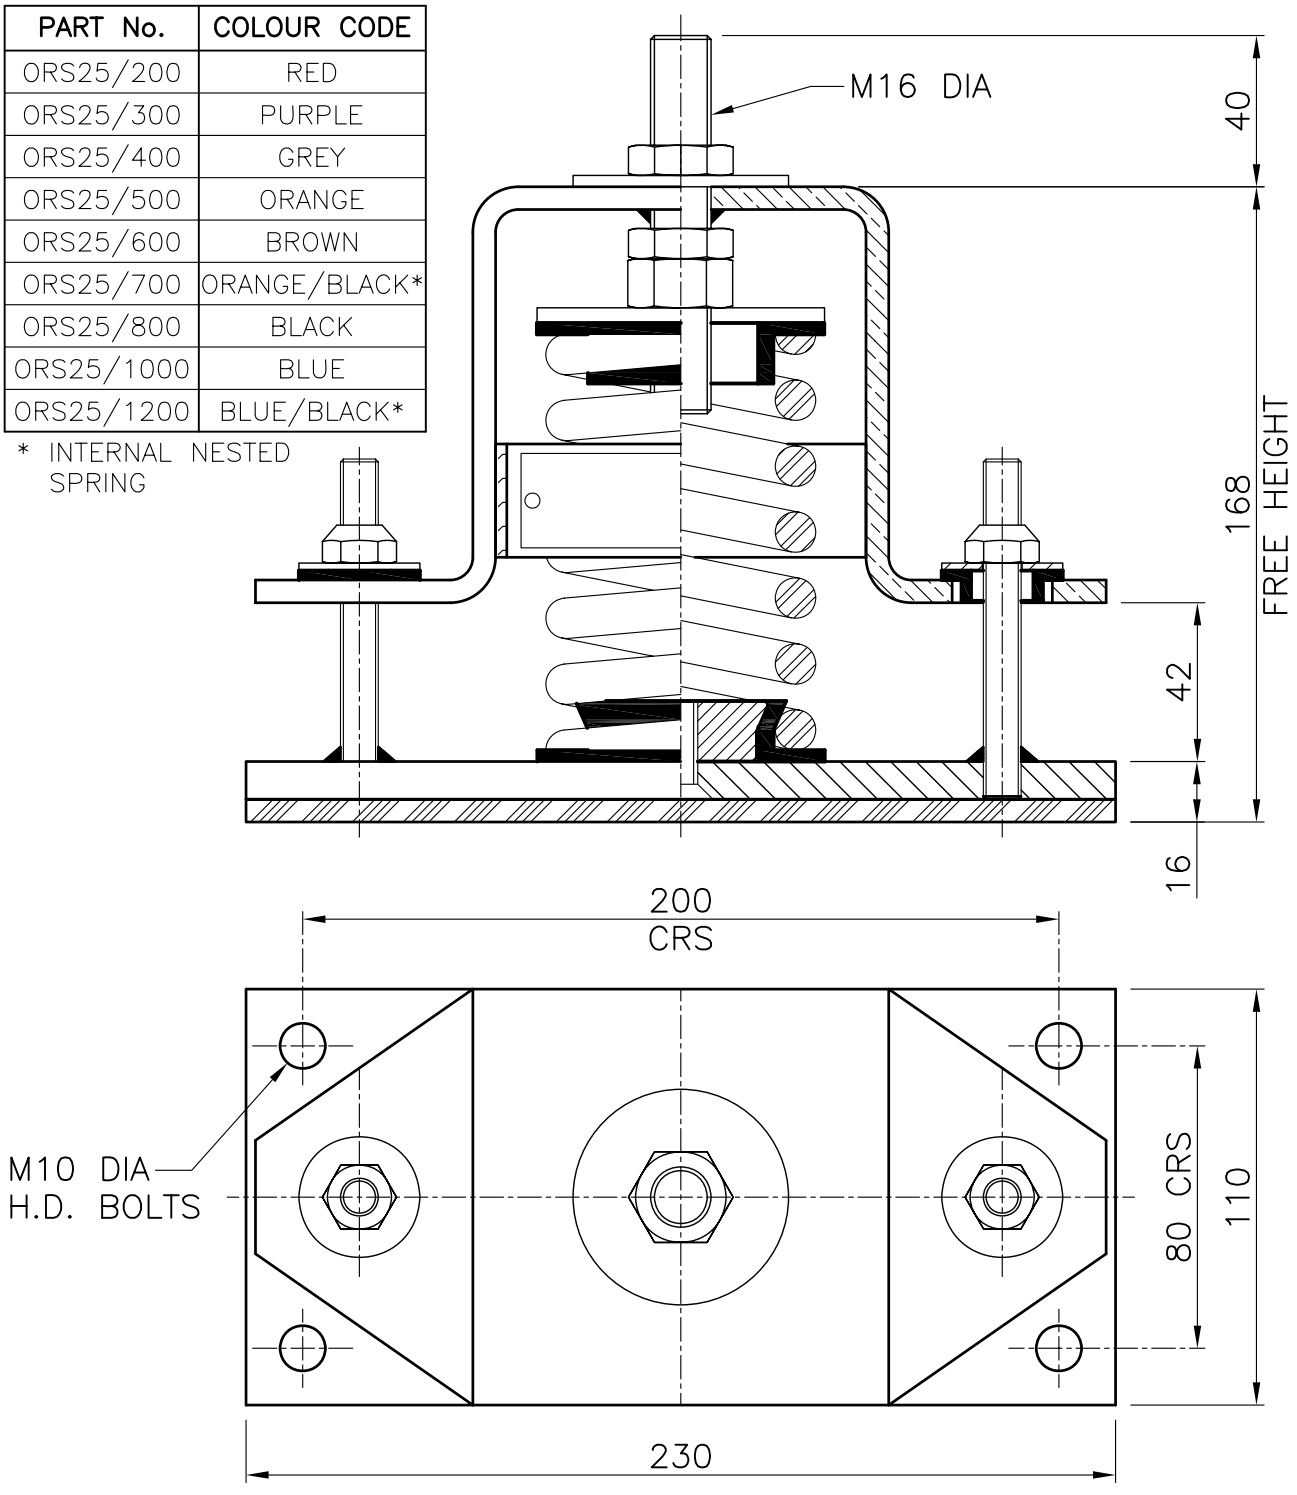

FOR GENERAL DETAILS SEE CHRISTIE & GREY LEAFLET PL005.
FOR INSTALLATION INSTRUCTIONS SEE CHRISTIE & GREY DATA SHEET DS 025.

Drawing No. S 125	A 11/10/99	B 02/08/04	C 02/11/05	D 20/04/11		Job No. –
						Scale 1 : 2
						Drawn D.H
Change note No.		172	138	047		Checked A.R.B

CHRISTIE & GREY
Engineers in vibration, noise and shock control.
Christie & Grey
Morley Road, Tonbridge,
Kent, TN9 1RA England