

Open Spring Mountings

Type OS50, OS60, OS75 & OS100



Originally designed for use with Type IPF Inertia Pouring Frames, the OS Mountings are now widely used to isolate vibration from every conceivable type of rotating and reciprocating machine. Where control of transient motion is required Open Spring Mountings can be used in conjunction with our Viscous Dampers Type SFD.

For applications requiring bolting down, the rubber seating pad and grommets ensure that there is no direct metal path between the machine and the seating, thus enhancing the high frequency noise isolation.


DESIGN FEATURES

- Nominal 50, 60, 75 & 100 mm deflection colour coded helical steel springs to BS1726 Class B with 50% overload capacity and O/D equal to at least 85% of working height.
- Can be bolted to supporting structure or free standing on 6 mm thick ribbed rubber seating pad (fitted as standard).
- Fully height adjustable.
- All steel components are zinc plated.
- No snubbing gives maximum efficiency.



TYPICAL APPLICATIONS

- Axial and Centrifugal Fans.
- Air Handling Units.
- Low Level Pipework.
- With Inertia Bases type IPF for Pumps, Generating Sets and Compressors etc.


OS50/100 - OS50/500



STANDARD (WITH BASE PLATE)

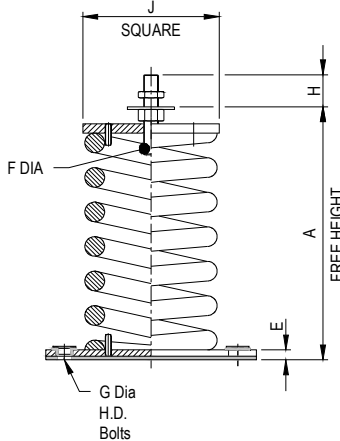

FREE STANDING VERSION (add /FS)



Spring Deflection

Spring stiffness is linear over its working range therefore the actual deflection for a given load can be calculated as follows:-

$$\text{Actual Deflection (mm)} = \frac{\text{Actual Load (kg)} \times \text{Rated Deflection (mm)}}{\text{Rated Load (kg)}}$$

TYPE OS MOUNTINGS - SIZES OS50, OS60, OS75 & OS100

PART No.	COLOUR CODE	RATED LOAD (kg)	DEFLECTION AT RATED LOAD (mm)	DIMENSIONS (mm)										WT (kg) MAX				
				A	B	C	D	E	F	G	H	J						
OS50/100	YELLOW	100	50															
OS50/200	GREEN	200	50															
OS50/300	BLUE	300	50	180	110	90	140	11	M16	M12	24	76	2.3					
OS50/400	WHITE	400	50															
OS50/500	RED/BLACK	500	50															
OS50/510	BLACK / PURPLE	510	51															
OS50/760	BLACK / GREY	760	51	235	210	150	250	16	M20	M16	42	150	11					
OS50/1000	BLACK / ORANGE	1000	50															
OS50/1300	BLACK / BROWN	1300	53															
OS50/1400	BLACK / WHITE	1400	50															
OS50/1600	BLACK / BLUE	1600	50	265	210	150	250	16	M20	M16	42	150	13					
OS50/2000	BLACK / GREEN	2000	50															
OS50/2500	BLACK / YELLOW	2500	50															
OS50/3000	BLACK / RED	3000	50	265	280	220	340	16	M24	M16	52	220	29					
OS50/3200	BLACK / PURPLE	3200	50															
OS60/200	GREEN	200	60															
OS60/300	BLUE	300	60															
OS60/400	WHITE	400	60															
OS60/500	RED	500	60	241	210	150	250	16	M20	M16	42	130	9.2					
OS60/600	PURPLE	600	60															
OS60/700	GREY	700	60															
OS60/800	ORANGE	800	60															
OS60/1000	BROWN	1000	60															
OS75/800	GREY / BLUE	800	75															
OS75/1000	GREY / WHITE	1000	75															
OS75/1200	GREY / RED	1200	75	285	280	220	340	16	M24	M16	52	220	25					
OS75/1400	GREY / PURPLE	1400	75															
OS75/1600	GREY / ORANGE	1600	75															
OS75/2000	GREY / BROWN	2000	75															
OS75/2500	RED	2500	75															
OS75/3200	GREY / BLACK	3200	75	365	280	220	340	16	M24	M16	52	220	37					
OS75/3500	BLACK	3500	75															
OS100/300	BLACK	300	100															
OS100/400	YELLOW	400	100	320	280	220	340	16	M24	M16	52	220	19					
OS100/600	WHITE/BLACK	600	100															
OS100/800	BLUE	800	100															
OS100/1000	WHITE	1000	100															
OS100/1200	RED	1200	100	355	280	220	340	16	M24	M16	52	220	26					
OS100/1400	PURPLE	1400	100															
OS100/1600	GREY	1600	100															
OS100/2000	ORANGE	2000	100															
OS100/2500	BROWN	2500	100	415	280	220	340	16	M24	M16	52	220	47					
OS100/3200	BLACK	3200	100															

ISOLATION EFFICIENCY AT TYPICAL MACHINE SPEEDS

MACHINE SPEEDS (rpm)	EFFICIENCY %			
	50 mm DEFL.	60 mm DEFL.	75 mm DEFL.	100 mm DEFL.
300	75.2	80.2	84.7	89.0
500	92.3	93.7	95.0	96.3
750	96.7	97.3	97.8	98.4
1000	98.2	98.5	98.8	99.1
1200	98.7	99.0	99.2	99.4
1500	99.2	99.3	99.5	99.6
1750	99.4	99.5	99.6	99.7
2000	99.5	99.6	99.7	99.8

The above figures are theoretical values only based on the vertical natural frequency of the sprung system assuming infinitely stiff structural supports. The effects of high frequency spring coil resonances on low frequency performance are also ignored.

For full installation instructions please refer to our data sheet DS027.

For more detailed information and technical assistance please contact our Technical Department.

In the interests of continual development, the Company reserves the right to make modifications to these details without notice.



Christie & Grey Limited

Morley Road, Tonbridge, Kent TN9 1RA, England

Telephone : +44 (0) 1732 371100 • Fax: +44 (0) 1732 359666

E-mail : sales@christiegrey.com • web site: www.christiegrey.com

